

Tilt Device KE 2.5-R

Technical Data

Height of rotation axis	325 mm (above base plate)
Load capability	2.5 kg
Dimensions tilting plate (L x W)	500 x 300 mm
Material tilting plate	Rohacell (incl. mounting holes)
Dielectric constant ϵ_r at 1 MHz	1.1
Dimensions tilting device (L x W x H)	800 x 400 x 375 mm
Material tilting device	Plastic with low dielectric constant
Feed-trough in rotation axis for cables	Ø 40 mm
Polarisation	0°/90° (vert./hor.)
Polarisation time 0°/90°	approx. 3 sec
Drive via	non- metallic toothed belt
Polarisation drive	Pneumatic rotary actuator
Control	Solenoid valve
Pressure	max. 6 bar
Current consumption (outside chamber)	max. 2 A
Voltage	208-230 VAC, 50/60 Hz, single phase
Temperature range	+10°C to +35°C
Total weight	15 kg
Accessories	Interface to SCU/MCU/NCD Controller 2x 15 m air hose Service unit outside the chamber Service manual

Brief description

The Tilting Device **KE 2.5-R** is especially designed for radiated measurements on devices under test at horizontal rotation axis. Different types of devices can be mounted onto the tilting plate made of Rohacell.



Clamping bolts, made of Rohacell, are integrated on the tilting plate which allows the fixing and adjustment of cables.

The Tilting Device, with the exception of the pneumatic rotary actuator, is completely fabricated from plastic, mainly Rohacell, with a very low dielectric constant ϵ_r

Polarisation occurs using compressed air. A solenoid valve located outside of the chamber regulates the compressed air flow.

The **IEEE 488.2 (GPIB) bus** provides an additional control option for all functions, when operated with the **SCU/MCU or NCD Controller**.

Tilt Device KE 2.5-R

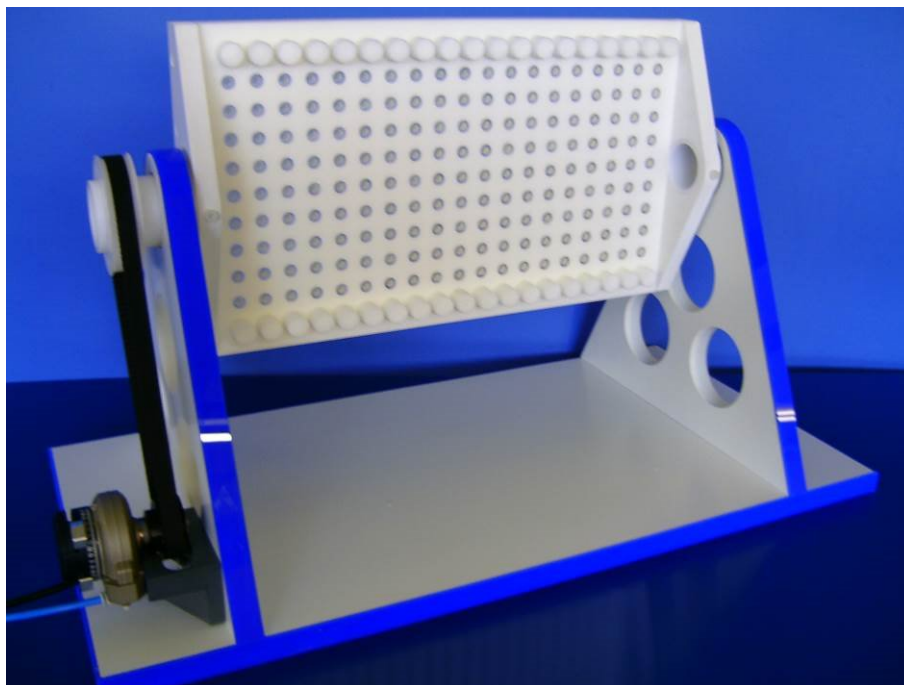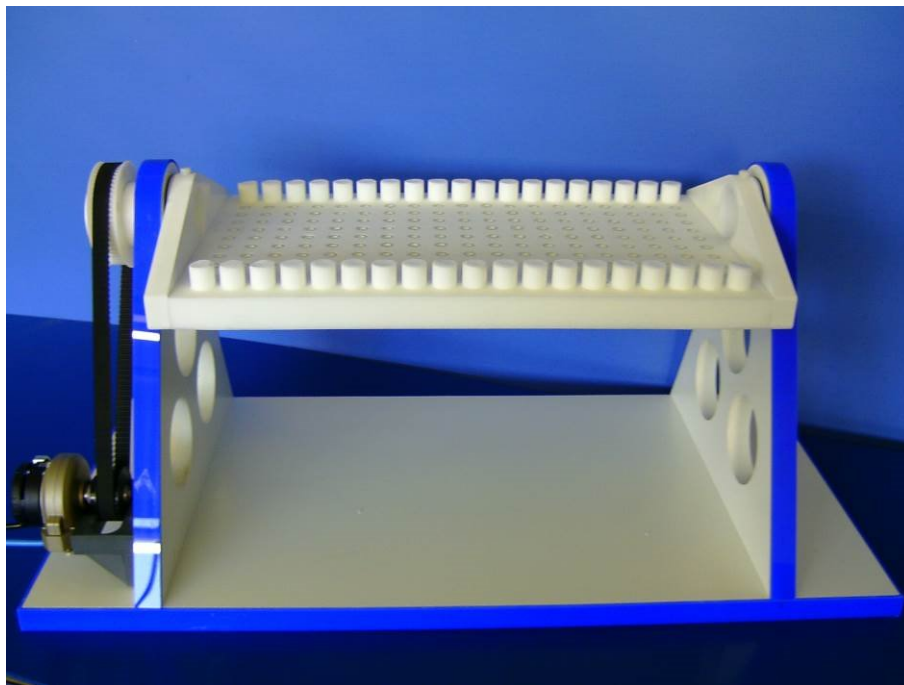

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.