


## Turntable TT 2.0 WF

### Technical Data

Diameter		2.0 m
Permissible load		500 kg
Point load		100 kg (at area of 10cm x 10cm)
Height		140 mm
Material carrier plate		Laminated wood
Rotating speed adjustable between		0.3 to 2.5 rpm
Rotating angle		+400°/-200°
Positioning accuracy		+/- 0.5°
Motor		Brushless DC motor 200 W
Interference suppression:		20 dB under limits EN 55022 class B
Turntable drive		Toothed belt drive (non-metallic)
Control cable		Fibre optic lines
Remote control via		IEEE interface
Current consumption	max.	2 A
Voltage		208-230 VAC, 50/60 Hz, single phase
Temperature range		+10°C to +35°C
Total weight	approx.	170 kg
Accessories		Interface to SCU/MCU/NCD Controller 1.5 m power supply cable Service manual

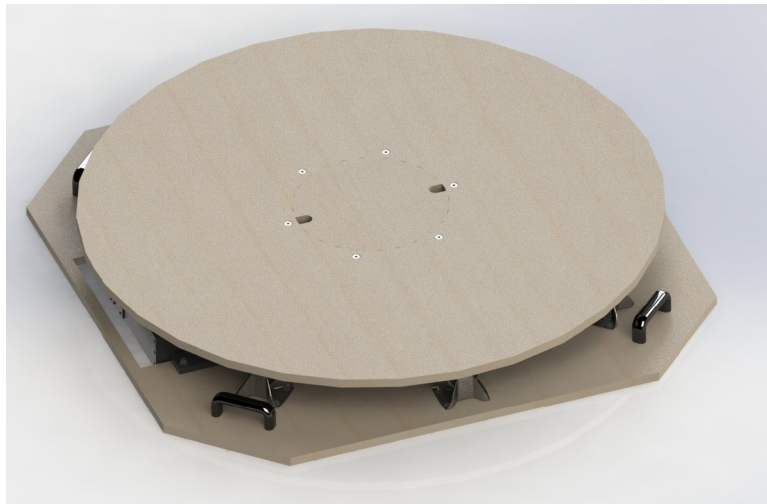

### Brief description

The turntable **TT 2.0 WF** is especially designed for freestanding installation on surface floor in electromagnetic absorption chambers. The carrier plate is made of waterproof, laminated and lacquered wood.

A 285 mm diameter opening in the centre of the turntable provides the capability to insert power supply for testing.

The **IEEE 488.2 (GPIB) bus** provides an additional control option for all functions, when operated with the **SCU/MCU or NCD Controller**.

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.