

## 3 Axis DUT Positioner APL-100kg

### Technical data:


Load capability	max. 100 kg
Distance center of gravity of DUT to mounting flange	max. 150 mm
Rotating angle azimuth (x-axis) electrically	+/- 180°
Speed azimuth adjustable	0.5°/s – 18°/s
Rotating angle polarization (y-axis) electrically	continuous
Speed polarization adjustable	0.5°/s – 30°/s
Polarization axis height above chamber floor	2.1 m
Positioning accuracy in each axis	+/- 0.03°
Linear movement range manually (manually lockable)	600 mm
Positioning accuracy linear	+/- 1 mm
Overall dimensions (L x W x H) in m	approx. 1.5 x 1.3 x 2.4
Motors	Synchronous servo motors
Drives	High accurate gears
Voltage	380 VAC – 480 VAC, 50 Hz / 60 Hz three phases
Current consumption	max. 16 A
Required RCD	300 mA
Control cable	Fiber optic lines
Remote control via	LAN (TCP/IP); (IEEE only with NCD)
Interference suppression	20 dB under limits DIN EN 55011:2018-05 class B
Operating temperature	10° C – 35 ° C
Total weight	approx. 1100 kg
Accessories	Wooden plates for absorber mounting Absorbers for covering Mounting plate for antennas Power supply cable Service manual

Other specifications upon on request

## Properties of the APL

- Azimuth, polarization and linear positioner
- Spherical Great-Circle Cut system
- High accurate antenna measurement capabilities for both, near-field and far-field data acquisition
- 5G NR FR1 / FR2 OTA testing capabilities
- Accuracy enough for a frequency coverage up to 90 GHz
- Ideal for Antenna-Under-Test (AUT) like satellite dishes or massive MIMO base station-antennas
- Independent rotations of all motion axis
- Variable speed adjustments at all axis
- Readout by high accurate encoders
- Integrated rotary joint for EUT and antennas available upon request
- Easy installation and implementation in existing chambers

The **LAN (TCP/IP) - interface** provides an additional control option for all functions, when operated with the FCU<sup>3.0</sup> or NCD Controller

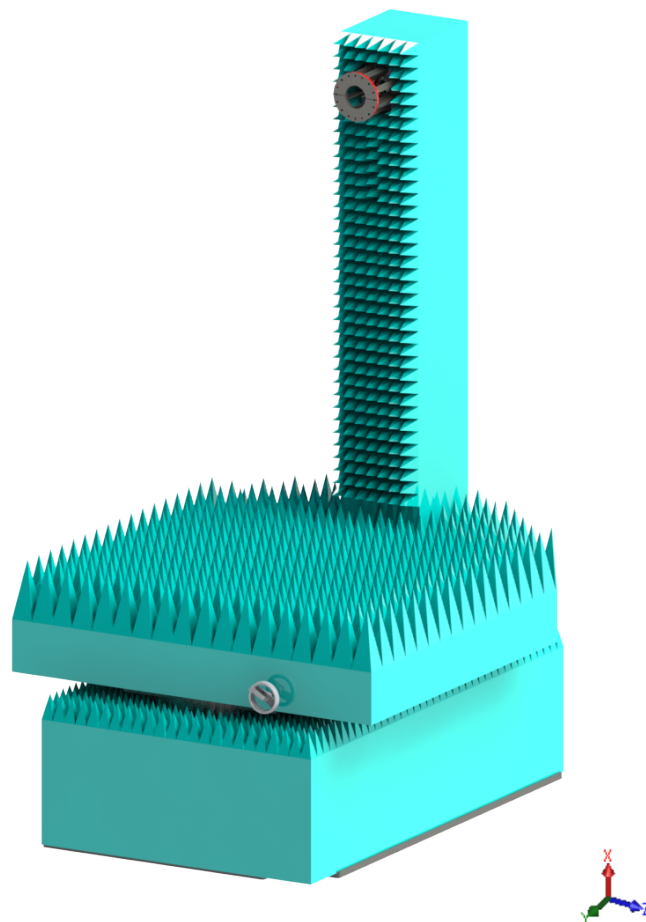

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.